RENO™ LIGHTING

Date:	Project Name:
Type:	Part Number:





EMERGENCY SERIES

LED RUNNING MAN

PRIME

DESCRIPTION

The Emergency Series is encased in UV-stabilized thermoplastic material. It comes standard with a mounting canopy, three pictograms, one backplate and all mounting hardware. An external LED status indicator and test switch is standard. Powered with long life LED chips, they are the perfect choice for both new and retrofit projects.

FEATURES

- Damp location
- Thermoplastic ABS heads
- Nickel Cadmium Battery
- Easy Installation & Maintenance
- 120 minutes discharge after battery charge 24 hours
- Operating temperature: 14°F to +104°F (-10°C to +40°C)
- 120 minute battery backup
- Voltage 120/277/347V
- 5 year warranty

APPLICATIONS

- Commercial building
- Hospitals
- Retail
- Schools

FC RoHS DUAL VOLTAGE 120-347V SA 5 YR WARRANTY


RENO™ LIGHTING

Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	VOLTAGE (V)	TYPE	POWER CONSUMPTION	LAMP HEAD	BATTERY TYPE
R61001	RENO-RMS-U	2W	120/277/347V	Exit sign	2.7W at 120V 2.64W at 277V & 347V	No	3.6V Ni-cad
R61002	RENO-RMC-U	2W	120/277/347V	Sign & light Combo	3.93W at 120V 3.27W at 277V & 347V	2x2W (350lm)	3.6V Ni-cad

DIMENSIONS

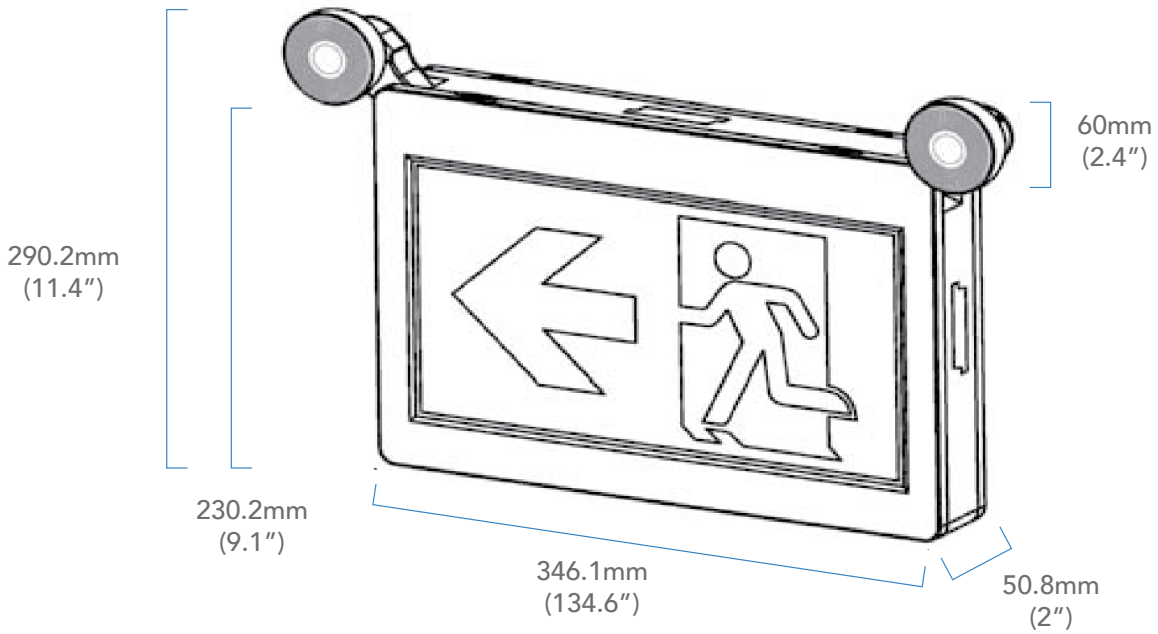

PICTOGRAMS INCLUDED


No Indicator



Left Indicator




Right Indicator




Date:	Project Name:
Type:	Part Number:

MOUNTING OPTIONS

Flag Mount



Wall Mount

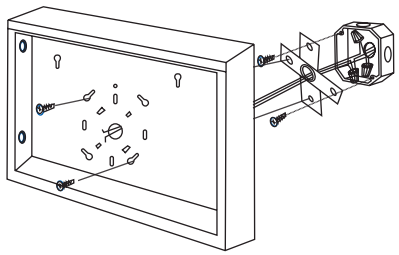

Ceiling Mount

